



Order code	EAN	Packaging - SKU
GPACLLRSN010	4891199214905	Eco blister, 1 pc/SKU
Product		
Category	LED Lamps	
Series	REFLECTOR MR11	
Model	GPACLLRSN010	
Description	GPLRSN210K-2U1, Reflector MR11 2-10W	
General description		
Energy label	G	
Lamp shape	Reflector MR11	
Lamp base	GU4	
Dimmable	No	
Mercury free	Yes	
Mercury content	0.0 mg	
Recycling	Yes	
Electrical characteristics		
Nominal wattage	2	
Rated wattage	2	
Equivalent incandescent lamp power	10W	
Power factor	0.4	
Voltage	AC/DC 12V	
Operating frequency	50/60Hz	
Lamp current	200mA	
Weighted Energy Consumption	2 kWh/1000h	
Light technical characteristics		
Light colour	WARM WHITE	
Colour temperature	2700K	
Colour rendering index (Ra)	80	
Colour consistency	≤6	
Nominal luminous flux	120lm	
Rated luminous flux	120lm	
Lumen maintenance factor at end of life	95.80%	
Nominlal beam angle	36°	
Rated beam angle	36°	
Warm-up time (60%)	≤0. 5S	
Starting time	≤0. 5S	
Lifespan		
Nominal life time	25000h	
Rated lamp life time	25000h	
Switching cycles	12500cycles	
Product dimensions		
Overall length (L)	40mm +/- 1mm	
Diameter (D)	35mm +/- 1mm	
Product Compliance	CE, ERP, ROHS, REACH	
Warranty	12 months from ex-factory date	
* Please refer to website www.gp-lighting.com for the list of compatible dimmers.		



Spectral Distribution

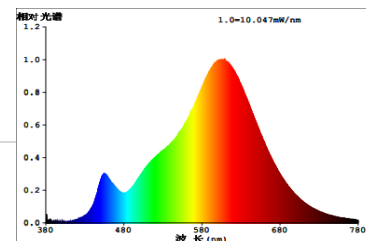

GP LED Lamps are designed for true direct replacement of standard

incandescent lamps.

- Compatible shapes and sizes of GLS
- Very low energy consumption
- Extremely long life
- Emit a warm white or cold white light for different ambience
- Instant start with full light output
- Available in most common lamp bases for household use
- No UV

Applications

- Domestic and commercial applications
- General illumination
- Can be used everywhere at home
- Use outdoors only in enclosed and ventilated luminaires