



PRODUCT DATA SHEET

GP LED Cordless Lights


Model: Pushlight
Model No.: 053729-LA

Revision History

Revision	Date	Reference No.	Reason for Change
0	24 September 2010	S-LA-100924-005 R0	New release

Prepared by Nathan Lo	Approved by Arie Yu
Date: 24 Sep 2010	Date: 24 Sep 2010

Lichon International Limited
Room 3, 12/F, Nam Wo Hong Building,
148 Wing Lok Street, Sheung Wan, Hong Kong
Tel: +852 2581 0912 Fax: +852 2581 0916
Email: gplighting@lichton.com
Website: <http://www.gp-lighting.com>

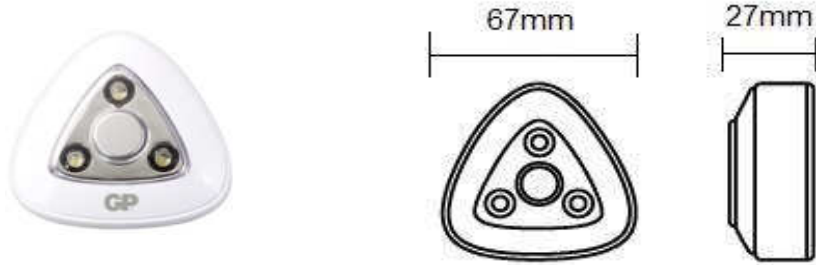

Unit: mm

Product Category	: LED Cordless Light
Product Name	: Pushlight
Description	: LED Portable Light
Input Voltage	: 4.5VDC (3 x 1.5V AAA batteries)
Operating Voltage	: 4.5V
Standby Current	: N/A
Operating Current	: N/A
LED Type	: 3 x Cool White
Luminous Flux / Intensity	: 45,000mcd in total *
PIR Lux	: N/A
Sensor	: N/A
Sensor Detection Coverage	: N/A
Battery Life Time	: ~10 hours continuously **
Operating Temperature	: 0°C to 45°C
Storage Temperature	: -20°C to 50°C
Housing Material	: ABS
IP Rating	: N/A
Approval	: CE
Dimension	: 67 (L) x 67 (W) x 27 (T) mm
Weight	: 37g
Warranty Period	: 12 months from ex-factory date

* Reading from the LED directly. There will be certain discount on the brightness reading after the LED is assembled in the actual product.

** Based on new alkaline batteries. Do not mix new and old batteries at the same time.